

CATALOG

2026-01



2026-01

1996 Yılından Gelen Tecrübe

Our prices are valid as of January 2026

Products are shipped from Fanpo ŞANLIURFA warehouses using the transportation warehouse or cargo specified by the dealer or customer.

Delivery of products sent by transportation or courier is the responsibility of the buyer, and the shipping fee is covered by the dealer/customer.

It must be checked that the products are undamaged before cargo or warehouse delivery. In case of damage, a delivery report must be kept and returned with the same cargo or warehouse.

All sales prices are calculated excluding tax.

Sales prices and conditions Fanmot Motor Pompa Makina Elek. Ltd. It may be changed by ltd şti without notice.



Dear customers, as our company, we always aim to offer you the highest quality products at the most affordable prices. We have continued our efforts in this direction in our 2026 price list. With the price list specially prepared for the beginning of the new year, we will continue to offer you more affordable prices.

4" SUBMERSIBLE PUMP & MOTOR



4" SUBMERSİBLE MOTORS&PUMPS (MOTOR+PUMP)



MODEL		POWER		FLOW RATE													
PUMP TYPE	VOLT	KW	HP	m³/h	0	0,6	1,2	1,8	2,4	3	3,6	4,2	4,8	5,4	6,0	Q	
				lt/sn	0	0,17	0,33	0,5	0,66	0,83	1	1,17	1,33	1,5	1,66	İnç	
4SDM4/6	220V	0,37	0,5	Mss	42	41	39	38	36	33	30	25	19	13	6	1 1/4”	
4SDM4/8	220V	0,55	0,75		57	55	53	50	48	44	40	33	26	17	9		
4SDM4/10	220V	0,75	1		71	68	66	63	60	55	50	42	32	21	11		
4SDM4/14	220V	1,1	1,5		99	96	92	88	84	78	69	58	45	30	15		
4SDM4/18	220V	1,5	2		127	123	118	114	108	100	89	75	58	39	19		
4SDM4/26	220V	2,2	3		184	177	171	164	156	144	129	109	83	56	28		
4SDM4/33	220/380V	3	4		241	232	223	214	203	189	168	142	109	73	36		
4SDM4/44	220/380V	4	5,5		312	300	289	277	263	244	218	184	141	94	47		
4SDM4/49	220/380V	5,5	7,5		382	368	354	341	323	300	267	226	173	116	57		

MODEL		POWER		FLOW RATE												
PUMP TYPE	VOLT	KW	HP	m³/h	0	0,9	1,8	2,7	3,6	5,4	6	6,8	7,6	8,4	Q	
				lt/sn	0										İnç	
4SDM6/13	220/380V	1,1	1,5	Mss	84	80	75	73	70	60	55	49	35	27	2”	
4SDM6/16	220/380V	1,5	2		102	95	90	88	86	83	67	60	45	30		
4SDM6/24	220/380V	2,2	3		155	145	135	133	129	115	101	80	73	51		

MODEL		POWER		FLOW RATE												
PUMP TYPE	VOLT	KW	HP	m³/h	0	1,2	2,4	3,6	4,8	6	7,2	8,4	9,6	10,8	Q	
				lt/sn	0										İnç	
4SDM8/7	220/380V	1,1	1,5	Mss	44	42	40	37	35	33	30	26	16	13	2”	
4SDM8/14	220/380V	1,5	2		88	84	80	76	70	67	60	52	33	26		
4SDM8/19	220/380V	2,2	3		120	114	108	103	95	90	80	70	45	35		
4SDM8/21	220/380V	3	4		132	126	119	114	105	100	90	77	50	38		
4SDM8/26	380V	4	5,5		163	156	148	140	130	122	110	95	62	47		
4SDM8/36	380V	5,5	7,5		225	216	205	195	180	169	150	131	86	65		

MODEL		POWER		FLOW RATE									
PUMP TYPE	VOLT	KW	HP	m³/h	0	1,8	3,6	5,4	9	10,8	12,6	14,4	Q
				lt/sn	0								
4SDM10/10	220/380V	1,5	2	Mss	62	59	56	52	48	41	31	16	2"
4SDM10/14	220/380V	2,2	3		86	83	79	73	68	58	44	23	
4SDM10/18	220/380V	3	4		111	106	101	94	87	74	56	29	
4SDM10/22	380V	4	5,5		136	130	123	115	106	91	68	36	
4SDM10/28	380V	5,5	7,5		173	166	157	147	135	116	87	46	

4" SUBMERSİBLE MOTORS&PUMPS (MOTOR+PUMP)

MODEL		POWER		FLOW RATE									
PUMP TYPE	VOLT	KW	HP	m³/h	0	3	6	9	12	15	18	21	Q
				lt/sn	0	0,83	1,66	2,50	3,33	4,16	5,00	5,83	İnç
4SDM16/10	220/380V	1,5	2	Mss	33	31	29	27	23	21	14	11	2"
4SDM16/14	220/380V	2,2	3		50	49	47	42	37	32	26	19	
4SDM16/18	220/380V	3	4		67	65	62	57	50	42	34	25	
4SDM16/22	380V	4	5,5		93	90	85	76	66	59	43	31	
4SDM16/28	380V	5,5	7,5		111	109	104	94	83	70	57	42	

4" SUBMERSİBLE MOTORS (MOTORS)

MOTOR TYPE	V	HZ	HP	KW	A	LENGTH (mm)	WEİGH (kg)
FM 0,5 HP	220V	50HZ	0,50	0,37	3,4	364	8,1
FM 0,7 HP	220V	50HZ	0,75	0,55	4,7	389	9,2
FM 1,0 HP	220V	50HZ	1,00	0,75	6,1	411	10,3
FM 1,5 HP	220V	50HZ	1,50	1,10	8,6	434	11,4
FM 2,0 HP	220V	50HZ	2,00	1,50	11,1	467	12,8
FM 3,0 HP	220V	50HZ	3,00	2,20	16,1	565	17,4

MOTOR TYPE	V	HZ	HP	KW	A	LENGTH (mm)	WEİGH (kg)
FM 1,0 HP	380V	50HZ	1,00	0,75	3,4	384	8,6
FM 1,5 HP	380V	50HZ	1,50	1,10	3,7	411	10,6
FM 2,0 HP	380V	50HZ	2,00	1,50	4,7	428	10,8
FM 3,0 HP	380V	50HZ	3,00	2,20	6,7	467	12,5
FM 4,0 HP	380V	50HZ	4,00	3,00	9,0	522	15,0
FM 5,5 HP	380V	50HZ	5,50	4,00	10,3	587	18,3
FM 7,5 HP	380V	50HZ	7,50	5,50	14,1	687	24,3
FM 10,0 HP	380V	50HZ	10,0	7,50	19,2	798	28,3





W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

6"7"8"10"SUBMERSIBLE MOTORS




FM6 SUBMERSIBLE MOTOR

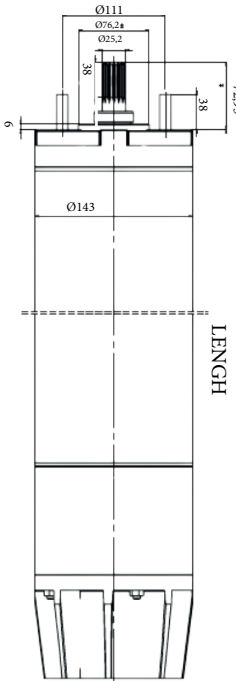


Motor Type	Frequency (Hz)	Power		Voltage(V)	Current (C)	Cos Ø	Rotation(Rpm)	Efficiency (%)	Max Thrust load (N)	Power Cable Section		Power Cable Length	Motor Dimensions	
										DOL	SD		Length	Weight
	Hz	Hp	Kw	Volt	Amper		Rpm	%	kN	mm2	mm2	Metre	mm	Kg
FM65	50	5,5		380	10,2	0,80	2885	74,5	22	3×1×2,5	3×2×2,5	3,5 m	690	42
	60			460	9,0	0,75	3495	74,4						
FM67	50	7,5		380	13,6	0,80	2880	77,3		3×1×2,5	3×2×2,5		735	46
	60			460	11,8	0,75	3490	78,0						
FM610	50	10		380	17,7	0,82	3875	78,5		3×1×2,5	3×2×2,5		780	51
	60			460	15,4	0,77	3490	79,4						
FM612	50	12,5		380	21,4	0,82	2875	79,7	25	3×1×2,5	3×2×2,5		810	55
	60			460	18,4	0,79	3480	79,9						
FM615	50	15		380	25,3	0,82	2870	80,6		3×1×2,5	3×2×2,5		840	57
	60			460	21,6	0,79	3480	81,4						
FM617	50	17,5		380	30,4	0,82	2870	79,2		3×1×2,5	3×2×2,5	890	63	
	60			460	26,3	0,79	3480	79,0						
FM620	50	20		380	34,5	0,83	2870	80,1		3×1×4	3×2×2,5	930	67	
	60			460	29,6	0,79	3480	80,5						
FM625	50	25		380	42,6	0,81	2870	82,0		3×1×4	3×2×4	1015	76	
	60			460	37,0	0,79	3475	79,9						
FM630	50	30		380	50,0	0,82	2860	81,5	28	3×1×6	3×2×4	4,5 m	1060	81
	60			460	43,2	0,79	3470	81,4						
FM635	50	35		380	58,6	0,81	2860	83,2		3×1×6	3×2×4		1165	92
	60			460	50,2	0,78	3470	83,9						
FM640	50	40		380	68,8	0,80	2870	83,3		3×1×10	3×2×4	4,5 m	1275	103
	60			460	59,6	0,76	3475	83,7						
FM650	50	50		380	84,5	0,81	2860	82,1		3×1×10	3×2×6		1365	113
	60			460	73,1	0,77	3465	82,5						
FM660	50	60		380								4,5 m		
	60			460										
TECHNICAL SPECIFICATIONS	Motor Pump Connection Standard				Nema 6”				MATERIALS	Rotor Shaft		X20CR13/AISI420		
	Motor Protection Class				IP68					Rotor Freeze		X17CrNi16-2/AISI431		
	Motor Isolation Class				Y					Upper Cover		GG25 PIG Casting		
	Nominal Working Frequency and Voltage				50 HZ-380 V 60 HZ-460 V					Middle Cover		GG25 PIG Casting		
	Max. Working Voltage Tolerance				+%10 -%10					Bottom Cover		GG25 PIG Casting		
	Max. Working Start Per Hour				30 °C					Motor Exterior Body		XC5CrNi18-10/AISI304		
	Max. Working				10					Locking		Polyamid6-6		
	Installation Type				“Horizontal (With the help of cooling jacket)					Mechanical Seal		SiC		
	Max. Thurust Load				5,5Hp-10Hp 22 kN 12,5Hp-25Hp 25kN 30Hp-50Hp 28kN					Thurst Bearing		CARBON		
										Power Cable Unsulate		Pvc		
										Winding Wire Insulate		Pvc		

FM7 SUBMERSIBLE MOTOR


Motor Type	Frequency (Hz)	Power		Voltage(V)	Current (C)	Cos Ø	Rotation(Rpm)	Efficiency (%)	Max. Thrust load (N)	Power Cable Section		Power Cable Length	Motor Dimensions	
										DOL	SD		Length	Weight
	Hz	Hp	Kw	Volt	Amper		Rpm	%	kN	mm2	mm2	Metre	mm	Kg
FM730	50	30	22	380	48,0	0,85	2890	81,9	35	3×1×6	3×2×6	4,3	890	91
	60			460	41,7	0,85	3495	77,9						
FM740	50	40	30	380	62,0	0,86	2875	85,5		3×1×10	3×2×6		970	104
	60			460	54,0	0,86	3490	81,1						
FM750	50	50	37	380	77,0	0,86	2885	84,9		3×1×16	3×2×6		1060	118
	60			460	66,0	0,86	3495	81,8						
FM760	50	60	45	380	91,0	0,86	2885	87,4		3×1×16	3×2×10		1140	133
	60			460	81,0	0,86	3490	81,1						
FM770	50	70	51	380	107,0	0,85	2890	85,2		3×1×16	3×2×10		1250	148
	60			460	93,0	0,85	3495	81,0						
FM780	50	80	59	380	119,0	0,86	2890	87,6		3×1×25	3×2×10		1320	165
	60			460	104,2	0,86	3500	82,6						
FM790	50	90	66	380	131,0	0,86	3885	89,0		3×1×25	3×2×10		1430	176
	60			460	111,1	0,86	3490	86,7						

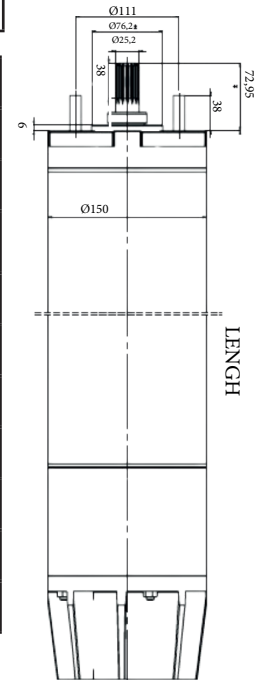

TECHNICAL SPECIFICATIONS	Motor Pump Connection Standard	Nema 8"	MATERIALS	Rotor Shaft	X20CR13/AISI420
	Motor Protection Class	IP68		Rotor Freeze	X20CR13/AISI420
	Motor Isolation Class	Y		Upper Cover	GG25 PIG Casting
	Nominal Working Frequency and Voltage	50 HZ-380 V 60 HZ-460 V		Middle Cover	GG25 PIG Casting
	Max. Working Voltage Tolerance	+%10 -%10		Bottom Cover	GG25 PIG Casting
	Max. Working Start Per Hour	30 °C		Motor Exterior Body	XC5CrNi18-10/AISI304
	Max. Working	10		Locking	Polyamid6-6
	Installation Type	"Horizontal (With the help of cooling jacket)		Mechanical Seal	SiC
				Thrust Bearing	CARBON
	Max. Thrust Load	35 KN		Power Cable Unsulate	Pvc
				Winding Wire Insulate	Pvc




FM 8" SUBMERSIBLE MOTOR

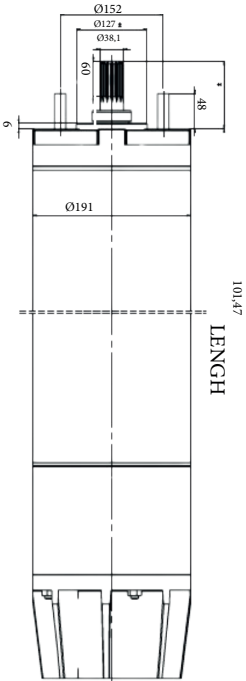


Motor Type	Frequency (Hz)	Power		Voltage(V)	Current (C)	Cos Ø	Rotation(Rpm)	Efficiency (%)	Max. Thrust load (N)	Power Cable Section		Power Cable Length	Motor Dimensions		
										DOL	SD		Length	Weight	
		Hz	Hp		Kw		Volt	Amper		Rpm	%	kN	mm2	mm2	Metre
FM830	50	30	22	380	50,0	0,85	2880	78,7	40	3×1×10	3×2×6	4,3	925	120	
	60			460	42,2	0,85	3500	77,0							
FM840	50	40	30	380	62,0	0,87	2875	84,5		3×1×10	3×2×10		1005	129	
	60			460	54,7	0,84	3500	82,4							
FM850	50	50	37	380	76,0	0,87	3885	85,0		3×1×10	3×2×10		1055	139	
	60			460	66,0	0,85	3490	83,3							
FM860	50	60	45	380	90,0	0,87	2885	87,3		3×1×16	3×2×10		1105	147	
	60			460	80,3	0,85	3490	83,2							
FM875	50	75	55	380	112,0	0,87	2870	85,8		3×1×16	3×2×10		1185	163	
	60			460	93,4	0,86	3480	85,9							
FM880	50	80	59	380	117,0	0,87	2870	88,1		3×1×16	3×2×10		1195	164	
	60			460	99,2	0,86	3470	86,8							
FM885	50	85	63	380	126,0	0,87	2880	87,3		3×1×25	3×2×10		1225	174	
	60			460	107,6	0,86	3485	85,5							
FM890	50	90	66	380	141,0	0,87	2885	81,7		3×1×25	3×2×10		1295	187	
	60			460	118,0	0,86	3490	81,6							
FM895	50	95	70	380	141,0	0,87	2890	86,7		3×1×25	3×2×10		1325	193	
	60			460	118,8	0,87	3485	85,5							
FM8100	50	100	75	380	147,0	0,87	2890	89,1		3×1×25	3×2×16		1365	202	
	60			460	130,3	0,86	3485	84,0							
FM8110	50	110	81	380	161,0	0,87	2900	87,9		3×1×25	3×2×16		1455	220	
	60			460	140,3	0,85	3485	85,3							
FM8125	50	125	92	380	182,0	0,87	2900	88,3	45	3×2×16	3×2×16	1565	242		
	60			460	157,4	0,84	3495	87,3							
FM8150	50	150	110	380	220,0	0,87	2910	87,3		3×2×25	3×2×25			1715	272
	60			460	187,7	0,83	3505	88,6							

TECHNICAL SPECIFICATIONS	Motor Pump Connection Standard	Nema 8”	MATERIALS	Rotor Shaft	X20CR13/AISI420
	Motor Protection Class	IP68		Rotor Freeze	X20CR13/AISI420
	Motor Isolation Class	Y		Upper Cover	GG25 PIG Casting
	Nominal Working Frequency and Voltage	50 HZ-380 V 60 HZ-460 V		Middle Cover	GG25 PIG Casting
	Max. Working Voltage Tolerance	+%10 -%10		Bottom Cover	GG25 PIG Casting
	Max. Working Start Per Hour	30 °C		Motor Exterior Body	XC5CrNi18-10/AISI304
	Max. Working	10		Locking	Polyamid6-6
	Installation Type	“Horizontal (With the help of cooling jacket)		Mechanical Seal	SiC
				Thurst Bearing	CARBON
	Max. Thurust Load	30Hp-110Hp 40 kN 125Hp-150Hp 55 kN		Power Cable Unsulate	Pvc
		Winding Wire Insulate	Pvc		




FM10" SUBMERSIBLE MOTOR

Motor Type	Frequency (Hz)	Power		Voltage (V)	Current (C)	Cos Ø	Rotation (Rpm)	Efficiency (%)	Max. Thurst load (N)	Power Cable Section		Power Cable Length	Motor Dimensions	
										DOL	SD		Length	Weight
	Hz	Hp	Kw	Volt	Amper		Rpm	%		kN	mm2	mm2	Metre	mm
FM10100	50	100	75	380	150,0	0,87	2910	87,3		3×1×25	3×2×16		1225	247
	60			460	130,0	0,87	3480	83,2						
FM10110	50	110	81	380	166,0	0,87	2915	85,2		3×1×25	3×2×16		1265	260
	60			460	144,0	0,87	3485	81,2						
FM10125	50	125	92	380	181,0	0,89	2915	86,8		3×1×35	3×2×16		1315	274
	60			460	157,0	0,89	3480	82,6						
FM10150	50	150	110	380	220,0	0,89	2915	85,4		3×1×35	3×2×25		1445	313
	60			460	191,0	0,89	3485	81,2						
FM10175	50	175	129	380	255,0	0,89	2920	86,4		3×2×25	3×2×25		1545	341
	60			460	222,0	0,89	3500	81,9						
FM10200	50	200	147	380	290,0	0,89	2925	86,5		3×2×25	3×2×35		1665	377
	60			460	252,0	0,89	3500	82,3						
FM10225	50	225	165	380	325,0	0,89	2930	86,7		3×2×35	3×2×35		1735	398
	60			460	290,0	0,89	3500	80,2						
FM10250	50	250	185	380	365,0	0,90	2930	85,6		3×2×25	3×2×35		1885	438
	60			460	315,0	0,90	3500	81,9						

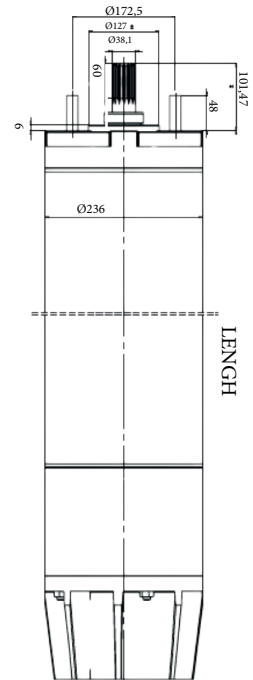

TECHNICAL SPECIFICATIONS	Motor Pump Connection Standard	Nema 8"	MATERIALS	Rotor Shaft	X20CR13/AISI420
	Motor Protection Class	IP68		Rotor Freeze	X20CR13/AISI420
	Motor Isolation Class	Y		Upper Cover	GG25 PIG Casting
	Nominal Working Frequency and Voltage	50 HZ-380 V 60 HZ-460 V		Middle Cover	GG25 PIG Casting
	Max. Working Voltage Tolerance	+%10 -%10		Bottom Cover	GG25 PIG Casting
	Max. Working Start Per Hour	30 °C		Motor Exterior Body	XC5CrNi18-10/AISI304
	Max. Working	10		Locking	Polyamid6-6
	Installation Type	"Horizontal (With the help of cooling jacket)		Mechanical Seal	SiC
	Max. Thurust Load	65 KN		Thurst Bearing	CARBON
				Power Cable Unsulate	Pvc
			Winding Wire Insulate	Pvc	

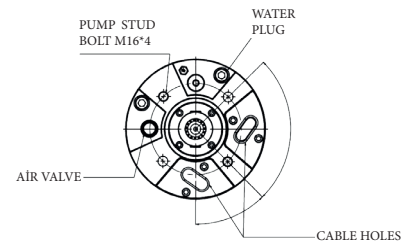

6"7"8"10"STAINLESS STEEL SUBMERSIBLE PUMPS



FANPO 6017 STAINLESS STEEL SUBMERSIBLE PUMPS



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	6	8	10	14	16	18	20	inç	mm	kg
			l/s	0	1,7	2,2	2,8	3,9	4,5	5	5,5			
FSP6017/01	4"	0,75		10	10	9	9	8	7	7	4	3"	330	5
FSP6017/02	4"	1,5		21	21	20	19	17	14	14	11		391	7
FSP6017/03	4"	3		34	33	32	30	28	25	22	19		450	8
FSP6017/04	4"	3		45	44	43	42	37	34	30	25		510	10
FSP6017/05	4"	4		58	56	54	52	47	43	38	32		569	11
FSP6017/06	4-6"	5,5		69	67	66	64	56	50	45	39		630	13
FSP6017/07	4-6"	5,5		81	79	78	75	67	61	54	46		691	14
FSP6017/08	4-6"	7,5		94	90	90	86	76	71	62	53		750	16
FSP6017/09	4-6"	7,5		103	102	100	96	86	77	69	59		810	17
FSP6017/10	4-6"	7,5		115	114	112	106	95	86	77	66		875	18
FSP6017/11	4-6"	10		127	125	122	118	104	95	85	73		934	20
FSP6017/12	4-6"	10		139	136	133	129	114	103	92	78		994	21
FSP6017/13	4-6"	10		151	148	144	139	123	111	101	86		1056	23
FSP6017/14	6"	12,5		162	159	155	150	132	123	109	93		1116	24
FSP6017/15	6"	12,5		174	170	166	161	142	130	114	97		1177	26
FSP6017/16	6"	12,5		182	183	175	172	151	138	122	104		1237	27
FSP6017/17	6"	12,5		195	192	186	180	161	147	130	113		1298	29
FSP6017/18	6"	15		210	203	201	192	170	156	138	119		1358	30
FSP6017/19	6"	15		222	215	212	203	180	164	144	124		1419	31
FSP6017/20	6"	15		230	226	223	214	190	173	153	132		1479	33
FSP6017/21	6"	17,5		244	238	234	224	199	182	160	139		1540	34
FSP6017/22	6"	17,5		256	249	240	235	212	190	168	145		1600	36
FSP6017/23	6"	17,5		267	260	252	245	221	200	178	151		1661	37
FSP6017/24	6"	17,5		279	272	260	256	229	209	186	158		1721	39
FSP6017/25	6"	20		290	283	273	268	235	215	190	165		1782	40
FSP6017/26	6"	20		300	295	289	281	248	225	200	171		1843	42
FSP6017/27	6"	20		312	305	301	292	257	234	209	178		1902	43
FSP6017/28	6"	25		324	315	312	301	266	244	215	185		1963	45
FSP6017/29	6"	25		335	331	323	312	277	252	225	191		2024	46
FSP6017/30	6"	25		346	342	334	324	286	260	232	196		2085	47
FSP6017/31	6"	25		355	350	345	335	295	270	240	204		2147	49
FSP6017/32	6"	25		370	363	356	345	304	278	245	211		2205	50
FSP6017/33	6"	25		382	370	367	355	314	286	253	218		2265	52
FSP6017/34	6-7"	30		394	390	378	370	324	295	261	224		2326	53
FSP6017/35	6-7"	30		405	395	390	380	333	303	268	231		2367	55
FSP6017/36	6-7"	30		417	410	400	385	344	312	275	237		2448	56
FSP6017/37	6-7"	30		430	420	412	395	352	321	286	245		2509	58
FSP6017/38	7"	30		441	430	423	410	364	330	294	250		2570	59
FSP6017/39	7"	30		450	443	435	420	370	338	299	257		2879	60
FSP6017/40	7"	30		460	455	445	430	382	346	310	264		2939	62

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

FANPO 6024 STAINLESS STEEL SUBMERSIBLE PUMPS

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	-	0	12	16	20	24	28	32	inç	mm	kg
			l/s	-	0	3,4	4,5	5,6	6,7	7,8				
FSP6024/01	4"	1,5	-	-	13	12	11	10	8	6	4	3"	394	10
FSP6024/02	4"	3	-	-	27	24	22	21	17	13	8		490	12
FSP6024/03	4"	4	-	-	40	36	33	31	25	19	12		585	14
FSP6024/04	4-6"	5,5	-	-	54	48	45	41	34	26	16		683	16
FSP6024/05	4-6"	5,5	-	-	67	60	56	51	42	32	20		779	18
FSP6024/06	4-6"	7,5	-	-	80	72	67	62	51	38	24		890	21
FSP6024/07	4-6"	10	-	-	94	84	78	72	59	45	28		986	23
FSP6024/08	4-6"	10	-	-	107	96	89	82	68	51	32		1082	24
FSP6024/09	4-6"	10	-	-	121	108	100	92	76	57	36		1178	26
FSP6024/10	6"	12,5	-	-	134	119	112	103	85	64	40		1274	28
FSP6024/11	6"	12,5	-	-	147	131	123	113	93	70	43		1370	31
FSP6024/12	6"	15	-	-	161	143	134	123	102	77	48		1470	32
FSP6024/13	6"	15	-	-	174	155	145	133	110	83	52		1565	35
FSP6024/14	6"	17,5	-	-	188	167	156	144	119	89	55		1658	36
FSP6024/15	6"	17,5	-	-	201	179	167	154	127	96	59		1755	38
FSP6024/16	6"	20	-	-	215	191	178	164	136	102	63		1850	40
FSP6024/17	6"	20	-	-	228	203	190	174	144	109	67		1950	42
FSP6024/18	6"	25	-	-	241	215	201	185	153	115	72		2050	43,5
FSP6024/19	6"	25	-	-	255	227	212	195	161	121	76		2140	46
FSP6024/20	6"	25	-	-	268	239	223	205	170	128	79		2240	48
FSP6024/21	6"	25	-	-	282	251	234	215	178	134	83		2330	49,5
FSP6024/22	6"	25	-	-	295	263	245	226	187	140	87		2430	52
FSP6024/23	6-7"	30	-	-	308	275	256	236	195	147	91		2510	54
FSP6024/24	6-7"	30	-	-	322	287	268	246	204	153	96		2610	56
FSP6024/25	6-7"	30	-	-	335	299	279	256	212	160	99		2715	58
FSP6024/26	6-7"	30	-	-	349	311	290	267	221	166	103		2810	59
FSP6024/27	6-7"	35	-	-	362	323	301	277	229	172	107		2920	62
FSP6024/28	6-7"	35	-	-	375	335	312	287	238	179	111		3001	64
FSP6024/29	6-7"	35	-	-	389	347	323	297	246	185	115		3010	66
FSP6024/30	6-7"	35	-	-	402	358	335	308	255	192	119		3200	67
FSP6024/31	6-7"	40	-	-	416	370	346	318	263	198	123		3289	69
FSP6024/32	6-7"	40	-	-	429	382	357	328	271	204	127		3385	71
FSP6024/33	6-7"	40	-	-	442	394	368	339	280	211	131		3481	73

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)



FANPO 6030 STAINLESS STEEL SUBMERSIBLE PUMPS



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	7	14	22	24	29	36	43	inç	mm	kg
			l/s	0	2,1	4	6,1	7,1	8,2	10	11,9			
FSP6030/01	4"	1,5		11	10	9	8	8	7	4	2	3"	364	6
FSP6030/02	4"	3		22	22	20	18	17	14	10	4		459	9
FSP6030/03	4"	4		33	32	29	25	23	21	15	5		554	11
FSP6030/04	4"	5,5		48	46	43	38	36	21	22	10		649	13
FSP6030/05	4-6"	7,5		60	58	54	47	45	39	27	12		744	15
FSP6030/06	4-6"	7,5		72	69	64	57	54	46	33	15		839	17
FSP6030/07	4-6"	10		84	81	75	66	63	54	38	17		934	19
FSP6030/08	4-6"	10		96	92	86	76	71	62	44	20		1029	21
FSP6030/09	6"	12,5		108	104	97	85	80	70	49	22		1124	23
FSP6030/10	6"	12,5		119	116	107	95	89	77	54	25		1219	25
FSP6030/11	6"	12,5		131	127	118	104	98	85	60	27		1314	27
FSP6030/12	6"	15		143	139	129	113	107	93	65	30		1409	29
FSP6030/13	6"	15		155	150	139	123	116	100	71	32		1504	31
FSP6030/14	6"	17,5		167	162	150	132	125	108	76	35		1599	33
FSP6030/15	6"	17,5		179	173	161	142	134	116	82	37		1694	36
FSP6030/16	6"	20		191	185	172	151	143	124	87	40		1789	38
FSP6030/17	6"	20		203	196	182	161	152	131	93	42		1884	40
FSP6030/18	6"	25		215	208	193	170	161	139	98	45		1979	42
FSP6030/19	6"	25		227	220	204	180	170	147	103	47		2074	44
FSP6030/20	6"	25		239	231	214	189	179	155	109	50		2169	46
FSP6030/21	6"	25		251	243	225	199	188	162	114	52		2264	48
FSP6030/22	6-7"	30		263	254	236	208	197	170	120	54		2359	50
FSP6030/23	6-7"	30		275	266	247	218	206	178	125	57		2454	52
FSP6030/24	6-7"	30		287	277	257	227	214	185	131	59		2549	54
FSP6030/25	6-7"	30		299	289	268	236	223	193	136	62		2644	56
FSP6030/26	6-7"	30		311	301	279	246	232	201	142	64		2739	58
FSP6030/27	6-7"	35		323	312	290	255	241	209	147	67		2834	60
FSP6030/28	6-7"	35		334	325	301	266	252	218	154	69		2929	62,5
FSP6030/29	6-7"	35		347	335	311	274	262	225	159	73		3024	65
FSP6030/30	6-7"	35		359	348	323	284	268	232	163	74		3119	67
FSP6030/31	6-7-8"	35		372	356	331	291	278	241	171	77		3214	69
FSP6030/32	6-7-8"	40		383	372	346	304	286	247	175	80		3309	71
FSP6030/33	6-7-8"	40		394	381	354	312	295	255	180	82		3404	73
FSP6030/34	6-7-8"	40		406	393	365	322	304	263	185	84		3499	75
FSP6030/35	6-7-8"	40		418	405	375	331	313	270	191	87		3594	77
FSP6030/36	6-7-8"	50		430	416	386	340	322	278	196	89		3689	79
FSP6030/37	6-7-8"	50		442	428	397	350	331	286	201	92		3784	81
FSP6030/41	6-7-8"	50		490	474	440	388	366	317	223	102		4414	129
FSP6030/45	7-8"	60		538	520	483	426	402	348	245	111		4794	139
FSP6030/53	7-8"	70		633	613	568	501	474	409	289	131		5554	160

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

FANPO 6036 STAINLESS STEEL SUBMERSIBLE PUMPS

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	8	20	30	35	38	41	50	inç	mm	kg
			l/s	0	2,2	5,6	8,3	9,7	10,6	11,4	13,9			
FSP6036/01	4"	1,5		12	12	11	10	9	8	7	6	3"	382	7
FSP6036/02	4"	3		27	27	24	21	19	18	17	14		494	10
FSP6036/03	4-6"	5,5		42	42	37	32	30	29	27	21		606	12
FSP6036/04	4-6"	5,5		56	56	50	43	40	38	37	28		718	15
FSP6036/05	4-6"	7,5		70	70	62	54	50	48	46	37		830	18
FSP6036/06	4-6"	10		84	83	74	65	60	58	55	44		942	20
FSP6036/07	4-6"	10		98	98	88	76	70	67	64	52		1054	23
FSP6036/08	6"	12,5		112	112	99	86	80	77	73	58		1166	26
FSP6036/09	6"	15		126	126	112	96	91	87	82	65		1278	28
FSP6036/10	6"	15		140	140	124	108	100	95	91	75		1390	31
FSP6036/11	6"	17,5		154	154	137	119	111	106	101	80		1502	34
FSP6036/12	6"	17,5		167	167	149	130	120	115	110	87		1614	36
FSP6036/13	6"	20		181	182	160	140	131	125	119	94		1726	39
FSP6036/14	6"	20		195	196	173	151	141	135	128	102		1838	42
FSP6036/15	6"	25		209	209	186	162	151	143	137	109		1950	44
FSP6036/16	6"	25		223	224	199	173	160	154	146	116		2062	47
FSP6036/17	6"	25		237	238	211	183	171	163	155	123		2174	49
FSP6036/18	6"	25		251	252	223	194	181	173	165	131		2286	52
FSP6036/19	6-7"	30		265	266	236	205	191	183	174	138		2398	55
FSP6036/20	6-7"	30		279	280	248	216	201	192	183	145		2510	57
FSP6036/21	6-7"	30		293	294	261	227	211	202	192	152		2622	60
FSP6036/22	6-7"	35		307	308	273	238	221	211	201	160		2734	63
FSP6036/23	6-7"	35		321	322	285	248	231	221	210	167		2846	65
FSP6036/24	6-7"	35		335	337	298	259	241	231	219	174		2958	68
FSP6036/25	6-7"	35		349	351	310	270	251	240	229	181		3070	71
FSP6036/26	6-7"	40		363	365	323	281	261	250	238	189		3182	73
FSP6036/27	6-7"	40		377	379	335	292	273	260	247	196		3294	76
FSP6036/28	6-7"	40		391	393	347	303	282	270	256	203		3406	79
FSP6036/29	6-7-8"	50		405	407	360	313	293	279	265	210		3518	81
FSP6036/30	6-7-8"	50		419	421	372	324	301	290	274	218		3630	84
FSP6036/31	6-7-8"	60		433	435	385	335	311	300	283	225		3742	86
FSP6036/32	6-7-8"	70		447	449	397	346	321	310	293	232		3854	89
FSP6036/33	6-7-8"	70		461	463	410	357	331	319	302	239		3966	92



W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

FANPO 6046 STAINLESS STEEL SUBMERSIBLE PUMPS



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	22	28	37	43	46	51	59	inç	mm	kg
			l/s	0	6	8	10	12	13	14	16,2			
FSP6046/01	4"	3		15	12	11	9	8	7	6	3		382	7
FSP6046/02	4"	4		29	25	22	19	17	16	15	10		494	10
FSP6046/03	4-6"	7,5		45	39	35	32	28	26	24	20		606	12
FSP6046/04	4-6"	10		60	52	47	42	38	35	32	26		718	15
FSP6046/05	4-6"	10		74	65	59	53	47	44	41	33		830	18
FSP6046/06	6"	12,5		89	78	71	64	56	53	49	39		942	20
FSP6046/07	6"	15		104	91	83	74	66	61	57	46		1054	23
FSP6046/08	6"	17,5		119	104	95	85	75	70	65	51		1166	26
FSP6046/09	6"	20		134	117	106	95	85	79	73	59		1278	28
FSP6046/10	6"	20		149	130	118	106	94	88	81	65		1390	31
FSP6046/11	6"	25		164	144	130	117	103	96	89	72		1502	34
FSP6046/12	6"	25		179	157	142	127	113	105	97	78		1614	36
FSP6046/13	6-7"	30		193	170	154	138	122	114	106	85		1726	39
FSP6046/14	6-7"	30		208	183	166	148	131	123	114	91		1838	42
FSP6046/15	6-7"	30		223	196	177	159	141	132	122	98		1950	45
FSP6046/16	6-7"	35		238	209	189	170	150	140	130	104		2062	47
FSP6046/17	6-7"	35		253	222	201	180	160	149	138	111		2174	49
FSP6046/18	6-7"	40		268	235	213	191	169	158	146	117		2286	52
FSP6046/19	6-7"	40		283	248	225	201	178	167	154	124		2398	55
FSP6046/20	6-7"	40		298	261	237	212	188	175	162	130		2510	57
FSP6046/21	6-7"	50		313	274	248	223	197	184	171	137		2622	60
FSP6046/22	6-7"	50		327	287	260	233	207	193	179	144		2734	63
FSP6046/23	6-7"	50		342	300	272	244	216	202	187	150		2846	65
FSP6046/24	6-7"	50		357	313	284	254	225	211	195	157		2958	68
FSP6046/25	6-7"	60		372	326	296	265	235	219	203	163		3070	71

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

FANPO 6060 STAINLESS STEEL SUBMERSIBLE PUMPS

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	30	36	43	51	58	65	72	inç	mm	kg
			l/s	0	8,3	10	12	14,2	16	18,2	19,9			
FSP6060/01	4"	3		14	10	9	8	7	6	5	3		382	7
FSP6060/02	4"-6"	5,5		30	23	22	19	19	17	15	12		494	10
FSP6060/03	4"-6"	7,5		44	35	33	32	28	27	23	18		606	12
FSP6060/04	4"-6"	10		59	47	44	42	39	34	31	26		718	15
FSP6060/05	6"	12,5		74	59	55	50	46	42	38	32		830	18
FSP6060/06	6"	15		89	70	66	60	57	53	47	38		942	21
FSP6060/07	6"	17,5		104	82	77	73	66	1	54	44		1054	24
FSP6060/08	6"	20		118	94	89	83	75	70	62	49		1166	26
FSP6060/09	6"	25		133	105	98	93	85	79	70	55		1278	28
FSP6060/10	6"	25		148	117	110	103	94	87	76	63		1390	31
FSP6060/11	6"-7"	30		163	129	122	114	104	94	85	68		1502	34
FSP6060/12	6"-7"	30		178	140	133	120	114	105	92	74		1614	37
FSP6060/13	6"	35		192	152	144	132	121	113	99	80		1726	39
FSP6060/14	6"	35		207	164	155	142	131	122	108	86		1838	41
FSP6060/15	6"	35		222	176	166	152	142	131	115	93		1950	44
FSP6060/16	6"-7"	40		237	187	175	163	152	139	123	99		2062	46
FSP6060/17	6"-7"	40		252	199	186	173	160	148	131	106		2174	49
FSP6060/18	6"-7"	50		266	211	198	184	169	155	137	112		2286	52
FSP6060/19	6"-7"	50		281	222	209	194	179	163	145	120		2400	55
FSP6060/20	6"-7"	50		296	234	220	204	188	174	153	125		2510	57
FSP6060/21	6"-7"	50		311	246	231	215	198	180	160	130		2622	60
FSP6060/22	6"-7"	60		326	257	242	225	207	188	168	137		2734	63
FSP6060/23	6"-7"	60		340	269	253	235	216	200	175	143		2846	66
FSP6060/24	6"-7"	60		355	281	264	245	226	208	185	147		2958	69
FSP6060/25	6"-7"	60		370	293	275	256	236	215	190	153		3070	73

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)



FANPO 8075 STAINLESS STEEL SUBMERSIBLE PUMPS



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	20	58	64,9	72	79	86	96	inç	mm	kg
			l/s	0	5,5	16	18	20	22	24	26,7			
FSP8075/01	6"	5,5		19	19	15	15	14	13	11	8		571	26
FSP8075/02	6"	10		38	37	31	29	27	25	23	19		699	30
FSP8075/03	6"	15		58	56	46	44	41	38	34	28		827	34
FSP8075/04	6"	20		77	74	62	58	55	50	45	3		955	38
FSP8075/05	6"	25		96	93	77	73	68	63	57	47		1083	42
FSP8075/06	6-7-8"	30		115	111	93	88	82	75	68	56		1211	46
FSP8075/07	6"	35		135	130	108	102	96	88	79	66		1339	50
FSP8075/08	6-7-8"	40		154	149	124	117	109	101	91	75		1467	54
FSP8075/09	6-7-8"	40		173	167	139	132	123	113	102	84		1595	58
FSP8075/10	6-7-8"	50		193	186	155	146	137	126	112	94		1723	62
FSP8075/11	6-7-8"	50		211	204	170	161	150	138	125	103		1851	66
FSP8075/12	6-7-8"	60		231	223	186	175	164	151	136	112		1979	71
FSP8075/13	6-7-8"	60		251	241	201	190	178	164	147	122		2107	75
FSP8075/14	7-8"	70		270	260	217	205	191	176	159	131		2235	79
FSP8075/15	7-8"	70		285	279	232	219	205	189	170	140		2363	83
FSP8075/16	7-8"	75		305	297	247	234	219	201	181	150		2491	87
FSP8075/17	7-8"	80		325	316	263	249	232	214	193	159		2619	91
FSP8075/18	8"	85		345	334	278	263	246	226	204	169		2747	95
FSP8075/19	7-8"	90		360	353	294	278	260	239	215	178		2875	99
FSP8075/20	8"	95		380	371	309	292	273	252	227	187		3003	103
FSP8075/21	8-10"	100		400	390	325	307	287	264	238	197		3131	107
FSP8075/22	8-10	100		423	410	340	322	301	277	249	206		3259	111

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

FANPO 8095 STAINLESS STEEL SUBMERSIBLE PUMPS

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	20	40	60	70	90	100	110	inç	mm	kg
			l/s	0	5,6	11,1	16,7	19,4	25	28	31			
FSP8095/01	6"	7,5		25	24	21	19	18	16	15	13		571	26
FSP8095/02	6"	15		50	47	42	37	35	32	29	25		699	30
FSP8095/03	6"	20		75	71	63	56	53	48	44	38		827	34
FSP8095/04	6-7-8"	30		100	95	84	75	71	64	58	51		955	38
FSP8095/05	6-7"	40		125	119	105	93	89	79	73	63		1083	42
FSP8095/06	6-7-8"	50		150	142	126	112	106	95	88	76		1211	46
FSP8095/07	6-7-8"	50		175	166	148	131	124	111	102	89		1339	50
FSP8095/08	7-8"	60		200	190	169	149	142	127	117	101		1467	54
FSP8095/09	7-8"	60		225	214	190	168	159	143	131	114		1595	58
FSP8095/10	7-8"	75		250	237	211	187	177	159	146	127		1723	62
FSP8095/11	7-8"	80		275	261	232	205	195	175	161	139		1851	66
FSP8095/12	7-8"	90		300	285	253	224	213	191	175	152		1979	70
FSP8095/13	8-10"	100		325	310	274	243	230	206	190	165		2107	74
FSP8095/14	8-10"	100		350	332	295	261	248	222	204	177		2235	78
FSP8095/15	8-10"	110		375	356	315	280	266	238	219	190		2363	82
FSP8095/16	8-10"	125		400	380	337	299	283	254	234	203		2491	86
FSP8095/17	8-10"	125		425	404	358	347	301	270	248	215		2619	90
FSP8095/18	8-10"	150		450	427	379	336	319	286	263	228		2747	94
FSP8095/19	8-10"	150		475	451	401	355	337	302	277	241		2875	98
FSP8095/20	8-10"	150		500	475	422	373	354	318	282	253		3003	102
FSP8095/21	8-10"	150		525	499	443	392	372	333	307	266		3131	106
FSP8095/22	8-10"	175		551	523	464	411	390	349	321	279		3259	110

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)



FANPO 8096 STAINLESS STEEL SUBMERSIBLE PUMPS



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	20	40	70	90	100	110	125	inç	mm	kg
			l/s	0	5,6	11	20	25	27	30	34			
FSP8096/01	6"	10		22	21	20	17	15	14	13	10		571	26
FSP8096/02	6"	15		44	43	39	33	30	28	26	20		699	30
FSP8096/03	6"	25		65	64	59	50	45	43	39	30		827	34
FSP8096/04	6-7"	30		87	86	78	67	61	57	52	40		955	38
FSP8096/05	6-7"	35		109	107	98	84	76	71	65	50		1083	42
FSP8096/06	6-7-8"	50		131	129	117	100	91	85	78	61		1211	46
FSP8096/07	6-7-8"	50		153	150	137	117	106	100	91	71		1339	50
FSP8096/08	7-8"	60		175	171	157	135	121	114	104	82		1467	54
FSP8096/09	7-8"	70		196	193	176	151	136	128	117	90		1595	58
FSP8096/10	7-8"	75		218	214	196	167	152	142	130	100		1723	62
FSP8096/11	7-8"	80		240	236	215	184	167	157	143	110		1851	66
FSP8096/12	7-8"	90		262	257	235	201	182	171	156	120		1979	70
FSP8096/13	8-10"	100		284	279	255	217	197	185	169	130		2107	74
FSP8096/14	8-10"	100		305	300	274	234	212	199	182	140		2235	78
FSP8096/15	8-10"	110		327	321	294	251	227	214	195	150		2363	82
FSP8096/16	8-10"	125		350	343	313	268	242	228	208	160		2491	86
FSP8096/17	8-10"	125		371	364	333	284	258	242	221	170		2619	90
FSP8096/18	8-10"	150		393	386	352	301	273	256	234	180		2747	94
FSP8096/19	8-10"	150		415	407	372	318	288	271	247	192		2875	98
FSP8096/20	8-10"	150		436	429	392	334	303	285	260	202		3003	102
FSP8096/22	8-10"	175		450	445	410	350	320	300	280	215		3128	107
FSP8096/24	8-10"	200		467	460	430	370	340	315	297	230		3253	111

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

FANPO 1010 STAINLESS STEEL SUBMERSIBLE PUMPS

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W	
			m³/h	0	25	70	80	90	100	120	130	inç	mm	kg	
			l/s	0	6,9	19,4	22,2	25,0	27,8	33,4	36				
FSP10110/01	6"	10		27	27	22	21	21	20	16	14		686	32	
FSP10110/02	6"	20		55	53	45	43	42	39	33	28		842	38	
FSP10110/03	6-7-8"	30		82	80	67	65	63	59	49	43		997	45	
FSP10110/04	6-7-8"	40		110	107	90	87	83	79	66	57		1153	51	
FSP10110/05	7-8"	50		137	133	112	109	104	98	82	71		1309	57	
FSP10110/06	7-8"	60		165	160	135	130	125	118	99	85		1465	64	
FSP10110/07	7-8"	70		192	187	157	152	146	138	115	99		1620	70	
FSP10110/08	7-8"	80		220	213	180	174	167	158	131	114		1776	76	
FSP10110/09	7-8"	90		247	240	202	196	188	177	148	128		1932	83	
FSP10110/10	8-10"	100		274	267	225	217	208	197	164	142		2087	89	
FSP10110/11	8-10"	110		302	293	247	239	229	217	181	156		2243	95	
FSP10110/12	8-10"	125		329	320	270	261	250	236	197	170		2399	101	
FSP10110/13	8-10"	125		357	347	292	283	271	256	214	185		2554	108	
FSP10110/14	8-10"	150		384	373	315	304	292	276	230	199		2710	114	
FSP10110/15	8-10"	150		412	400	337	326	313	295	246	213		2866	120	
FSP10110/16	8-10"	175		439	427	360	348	333	315	263	227		3022	127	
FSP10110/17	8-10"	175		467	453	382	370	354	335	279	241		3177	133	
FSP10110/18	8-10"	175		494	480	405	391	375	355	296	256		3333	139	
FSP10110/19	8-10"	200		521	507	427	413	396	374	312	270		3489	145	
FSP10110/20	8-10"	200		549	533	450	435	417	394	329	284		3644	152	
FSP10110/21	-			-	-	-	-	-	-	-	-		-	-	-
FSP10110/22	-	-		-	-	-	-	-	-	-	-		-	-	-

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)



FANPO 10125 STAINLESS STEEL SUBMERSIBLE PUMPS



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	40	90	120	130	140	160	170	inç	mm	kg
			l/s	0	11,1	25	33,3	36,1	38	45	47,2			
FSP10125/01.B1		12,5		29	27	24	20	19	17	13	11		686	32
FSP10125/01		15		32	30	26	23	22	20	16	14		686	32
FSP10125/02.B2		25		59	55	47	41	38	35	27	21		842	39
FSP10125/02		30		64	60	52	46	43	40	33	28		842	39
FSP10125/03.B2		40		91	85	73	64	59	55	43	35		997	45
FSP10125/03		50		96	91	79	69	65	60	49	42		997	45
FSP10125/04.B4		50		117	110	94	81	76	69	53	43		1153	52
FSP10125/04		60		128	121	105	92	86	80	62	56		1153	52
FSP10125/05.B4		60		143	134	114	98	91	83	65	60		1309	58
FSP10125/05.B1		70		158	148	128	112	105	98	78	66		1309	58
FSP10125/05		75		160	151	131	115	108	100	81	70		1309	58
FSP10125/06.B3		80		184	173	149	130	122	112	89	74		1465	65
FSP10125/06		90		192	181	157	138	130	120	98	83		1465	65
FSP10125/07		100		225	211	183	161	151	140	114	97		1620	71
FSP10125/08.B3		110		249	234	203	177	166	153	122	103		1776	78
FSP10125/08		125		257	241	210	184	173	161	130	111		1776	78
FSP10125/09.B3		125		281	264	229	200	187	173	139	117		1932	84
FSP10125/09		150		289	272	236	207	194	181	146	125		1932	84
FSP10125/10		150		321	302	262	230	216	201	163	139		2087	91
FSP10125/11.B4		150		343	322	279	243	228	211	168	142		2243	97
FSP10125/11		175		353	332	288	253	238	221	179	153		2243	97
FSP10125/12		175		385	362	315	275	259	241	195	167		2399	104
FSP10125/13				417	392	341	298	281	261	211	181		2554	110

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)


FANPO 10160 STAINLESS STEEL SUBMERSIBLE PUMPS

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	80	100	120	140	160	180	200	inç	mm	kg
			l/s	0	22,2	27,8	33,3	38,9	44,4	50	55			
FSP10160/01.B1	6-7-8"	12,5		25	21	18	17	15	14	11	6		686	34
FSP10160/01	6-7-8"	15		30	25	24	22	21	19	16	13		686	34
FSP10160/02.B2	6-7-8"	25		53	43	40	38	35	31	25	17		842	40
FSP10160/02	6-7-8"	30		60	50	47	45	41	38	33	26		842	40
FSP10160/03.B3	6-7-8"	40		84	70	66	62	57	51	43	32		997	47
FSP10160/03	6-7-8"	50		90	76	71	67	62	57	49	39		997	47
FSP10160/04.B3	6-7-8"	50		110	91	85	80	74	65	54	39		1153	53
FSP10160/04	6-7-8"	60		119	101	95	89	83	75	65	52		1153	53
FSP10160/05.B3	6-7-8"	60		135	112	105	98	90	80	65	46		1309	60
FSP10160/05	7-8"	75		149	126	119	111	104	94	81	65		1309	60
FSP10160/06.B5	8-10"	80		172	142	134	125	116	104	87	66		1465	66
FSP10160/06	8-10"	90		179	151	142	134	124	113	98	78		1465	66
FSP10160/07.B6	8-10"	90		199	166	155	146	135	121	102	77		1620	73
FSP10160/07.B3	8-10"	100		204	171	161	151	140	126	108	84		1620	73
FSP10160/07.B1	8-10"	100		208	175	164	154	143	130	112	89		1620	73
FSP10160/07	8-10"	110		211	177	161	158	145	132	104	91		1620	73
FSP10160/08.B8	8-10"	110		226	187	184	165	152	136	100	93		1776	79
FSP10160/08.B5	8-10"	110		230	195	188	171	159	143	108	84		1776	79
FSP10160/08	8-10"	125		237	202	192	178	166	151	120	103		1776	79
FSP10160/09.B4	8-10"	125		263	220	196	182	180	162	140	107		1932	86
FSP10160/09.B3	8-10"	135		265	223	199	185	182	165	144	108		1932	86
FSP10160/09.B2	8-10"	135		267	224	201	187	185	167	150	110		1932	86
FSP10160/09	8-10"	150		272	227	204	200	187	170	148	117		1932	86
FSP10160/10.B3	8-10"	150		280	235	214	205	195	175	153	120		2087	92
FSP10160/10.B2	8-10"	150		290	245	225	215	200	184	156	125		2087	92
FSP10160/10	8-10"	150		301	252	235	223	207	188	162	128		2087	92
FSP10160/11	8-10"	175		329	277	255	245	228	207	182	143		2243	99
FSP10160/12	8-10"	200		362	303	275	267	250	225	193	155		2399	105
FSP10160/13	8-10"	200		393	328	310	290	270	245	213	167		2554	112
FSP10160/14	8-10"	225		424	353	320	312	290	264	225	181		2710	118
FSP10160/15	8-10"	250		452	378	337	334	311	283	243	195		2866	124
FSP10160/16	8-10"	125		475	403	379	356	332	302	260	210		3022	131



W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

5"6"7"8"10" CASTING PUMP

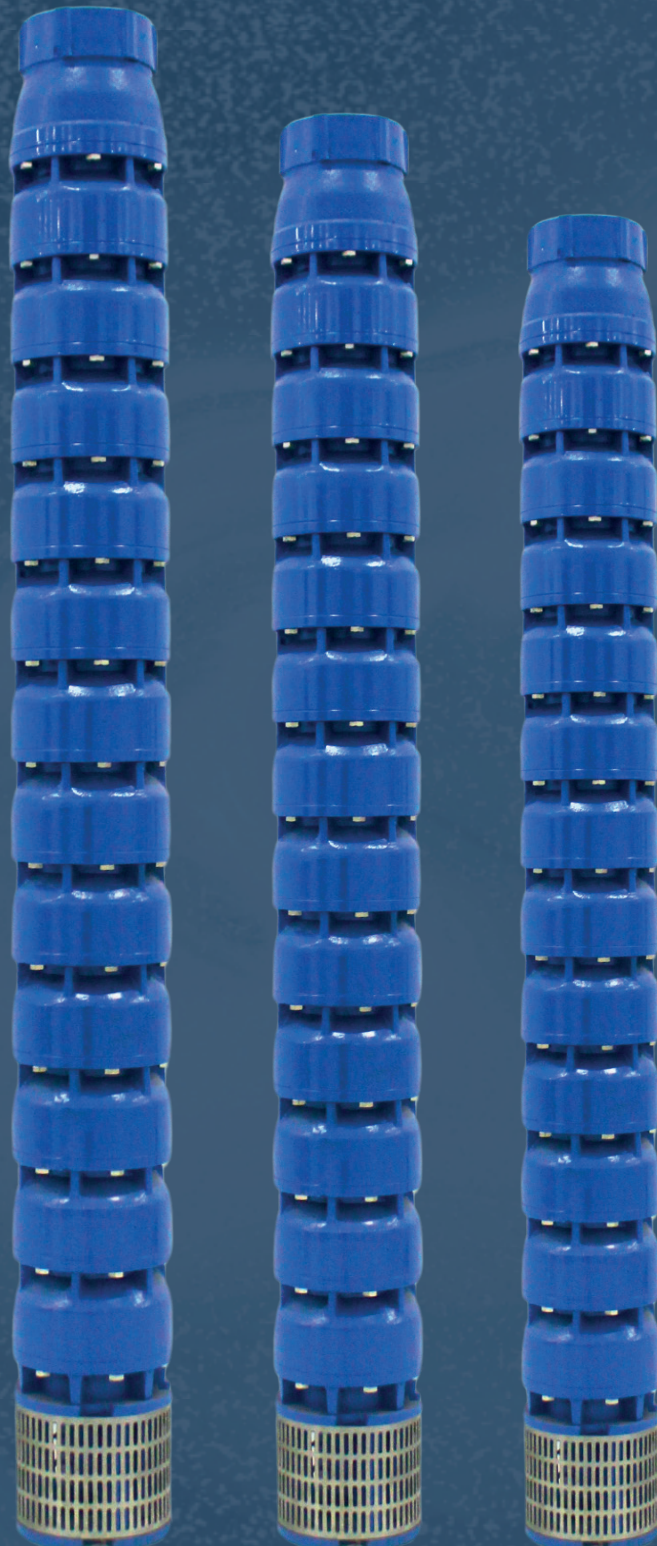

6" 6004-6005 NORYL SUBMERSIBLE PUMP

MODEL	GÜÇ		FLOW RATE									
PUMP TYPE	KW	HP	m³/h	0	5,00	6,12	7,20	8,9	10,4	10,8	12,6	Q
			lt/sn	0	1,40	1,70	2,00	2,45	2,90	3,00	3,50	İnç
FNP6004/07	4	5,5	Mss	125	115	105	100	90	80	75	55	2"
FNP6004/09	4	5,5		140	130	120	115	105	95	90	70	
FNP6004/12	5,5	7,5		180	170	162	156	145	137	122	95	
FNP6004/15	7,5	10		230	220	210	197	182	173	155	115	
FNP6004/21	9,2	12,5		320	305	290	275	268	245	215	165	
FNP6004/24	11	15		360	340	330	320	300	270	250	185	
FNP6004/30	15	20		430	404	392	375	350	320	270	220	
FNP6004/35	18,5	25		525	485	460	445	420	390	350	260	

MODEL	GÜÇ		FLOW RATE									
PUMP TYPE	KW	HP	m³/h	0	9,8	11,0	13,0	14,4	16,2	18,0	22,0	Q
			lt/sn	0	2,7	3	3,6	4	4,5	5,0	6,11	İnç
FNP6005/08	4	5,5	Mss	100	71	68	64	56	52	48	36	2"
FNP6005/11	4	5,5		130	110	104	95	80	70	65	50	
FNP6005/14	5,5	7,5		170	136	130	120	103	95	88	65	
FNP6005/15	7,5	10		200	175	170	160	141	120	114	85	
FNP6005/19	9,2	12,5		245	205	200	184	160	145	130	100	
FNP6005/21	11	15		270	240	231	220	210	195	180	160	
FNP6005/24	15	20		300	265	250	240	232	215	200	190	
FNP6005/26	18,5	25		350	307	295	270	245	230	210	200	
FNP6005/30	22	30		370	350	336	320	280	265	240	220	
FNP6005/35	30	40		485	430	414	370	324	300	272	240	

5" 5004 CAST IRON SUBMERSIBLE PUMP

MODEL	GÜÇ		FLOW RATE								
PUMP TYPE	KW	HP	m³/h	0	16	22,5	25,2	31	36	40	Q
			lt/sn	0	5,0	6,25	7,0	9,7	11,25	12,5	İnç
FNP5004/03	1,5	2		29	22	21	19	13	11	5	2 1/2”
FNP5004/04	2,2	3		40	30	29	28	20	18	8	
FNP5004/05	3,0	4		48	38	35	33	25	20	10	
FNP5004/06	4,0	5,5		60	46	42	41	34	25	13	
FNP5004/07	5,5	7,5		70	55	50	46	41	32	19	
FNP5004/08	7,5	10		85	65	58	55	48	41	28	

6" 6013 CAST IRON SUBMERSIBLE PUMP

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	20	25	32,5	40	47	54	60	inç	mm	kg
			l/s	0	5,5	7	9	11	13	15	16,6			
FCP6013/02	6"	5,5		30	28	26	24	21	18	14	9		555	28
FCP6013/03	6"	7,5		47	42	39	35	30	27	21	13		685	34
FCP6013/04	6"	10		63	55	51	46	38	35	28	17		815	40
FCP6013/05	6"	12,5		79	70	64	58	48	45	35	22		940	46
FCP6013/06	6"	15		95	83	77	70	59	54	42	25		1065	53,5
FCP6013/07	6"	17,5		110	97	90	82	70	62	49	30		1180	61
FCP6013/08	6"	20		126	110	102	94	78	71	56	35		1300	67
FCP6013/09	6"	25		142	125	115	105	90	80	63	39		1418	71
FCP6013/10	6-	25		158	137	128	117	100	90	70	43		1545	78
FCP6013/11	6-7-8"	30		174	151	141	130	109	97	77	47		1650	84
FCP6013/12	6-7-8"	30		190	166	155	141	119	105	84	53		1790	90
FCP6013/13	6-7-8"	35		205	180	167	154	130	115	91	56		1910	95
FCP6013/14	6-7-8"	35		221	194	180	165	141	125	98	60		2030	100
FCP6013/15	6-7-8"	40		237	207	193	177	150	132	105	65		2155	105
FCP6013/16	6-7-8"	40		253	220	206	190	159	142	112	70		2270	111.5
FCP6013/17	6-7-8"	50		272	235	218	200	168	151	119	75		2400	118
FCP6013/18	7-8"	50		286	248	230	213	180	160	126	79		2514	124.5
FCP6013/19	7-8"	50		302	263	245	225	191	169	133	84		2645	131
FCP6013/20	7-8"	50		316	275	157	236	200	177	140	88		2765	137.5
FCP6013/21	7-8"	60		333	290	271	250	210	187	147	93		2890	144
FCP6013/22	7-8"	60		350	305	183	260	219	196	154	97		3020	150.5
FCP6013/23	7-8"	60		363	320	296	273	228	205	161	102		3150	157
FCP6013/24	7-8"	60		380	330	308	285	237	214	168	105		3275	163.5
FCP6013/25	8"	75		400	345	321	297	246	223	175	110		3400	170
FCP6013/26	8"	75		420	360	334	309	255	232	182	114		3530	176.5



W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

6" 6012 CAST IRON SUBMERSIBLE PUMP



PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	21,6	27	33	39	41	45	48	inç	mm	kg
			l/s	0	7,5	7,5	9,11	11	11,5	12,5	13,4			
FCP6012/05	6”	5,5		65	60	55	45	30	25	20	12		858	47
FCP6012/06	6”	7,5		72	65	56	47	40	35	28	18		959	53,5
FCP6012/08	6”	10		90	76	70	66	50	40	28	21		1172	60
FCP6012/09	6”	12,5		105	90	80	70	58	47	36	24		1273	66.5
FCP6012/10	6”	15		120	107	95	80	65	55	43	33		1376	73
FCP6012/12	6”	20		145	120	110	85	75	60	47	38		1588	79.5
FCP6012/14	6”	25		176	148	140	108	80	75	51	42		1798	86
FCP6012/17	6”	30		215	180	165	135	105	90	65	52		2112	92.5
FCP6012/22	6-7”	40		260	245	220	180	137	120	90	75		2650	99
FCP6012/25	6-7”	50		295	270	240	200	165	135	120	100		2773	105.5

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

PUMP TYPE	İNÇ	HP	FLOW RATE									Q	L	W
			m³/h	0	30	36	51	60	65,8	75	84	inç	mm	kg
			l/s	0	8,3	10	14,1	16,6	18,3	20,8	23,3			
FCP6019/02	6"	7,5		29	23	22	18	15	12	9	5		570	27
FCP6019/03	6"	7,5		45	35	33	25	21	17	10	6		690	34
FCP6019/04	6"	10		60	47	44	36	29	24	14	7		814	41
FCP6019/05	6"	12,5		75	59	56	46	37	29	20	10		940	48
FCP6019/06	6"	15		89	70	65	52	44	34	24	13		1062	55
FCP6019/07	6"	17,5		103	82	78	65	52	43	28	16		1185	62
FCP6019/08	6"	20		120	95	88	75	59	49	33	20		1310	69
FCP6019/09	6"	25		134	106	100	84	67	55	37	22		1430	76
FCP6019/10	6"	25		151	120	112	93	74	61	40	23		1550	83
FCP6019/11	6-7-8"	30		163	129	122	102	79	66	45	24		1670	90
FCP6019/12	6-7-8"	30		179	143	134	111	88	73	48	26		1795	98
FCP6019/13	6-7-8"	35		195	157	146	120	97	80	58	31		1915	105
FCP6019/14	6-7-8"	40		209	167	156	130	103	85	57	32		2040	112
FCP6019/15	6-7-8"	40		226	183	168	140	114	94	60	35		2160	119
FCP6019/16	6-7-8"	50		236	192	178	147	121	100	68	39		2290	126
FCP6019/17	6-7-8"	50		246	202	188	154	129	107	77	42		2410	133
FCP6019/18	7-8"	60		257	212	198	161	138	114	86	45		2535	140
FCP6019/19	7*8"	60		270	224	208	174	146	121	95	48		2660	147

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

7" 7021 CAST IRON SUBMERSIBLE PUMP



PUMP TYPE	İNÇ	HP	FLOW RATE										Q	L	W
			m³/h	0	57	63	69	80	93	99	108	120	inç	mm	kg
			l/s	0	16	17	19	22	26	28	30	34			
FCP7021/02	6"	12,5		33	24	23	21	18	14	12	6	2		654	42
FCP7021/03	6"	20		51	38	36	33	28	22	18	9	4		782	49
FCP7021/04	6"	25		66	52	50	47	41	34	29	22	12		906	59
FCP7021/05	6"	25		84	66	63	58	52	44	38	30	18		1030	69
FCP7021/06	6-7-8"	30		99	89	74	70	63	52	46	36	22		1157	79
FCP7021/07	6-7-8"	35		116	91	87	83	74	62	55	44	26		1285	90
FCP7021/08	6-7-8"	40		133	115	108	99	84	70	62	49	30		1410	101
FCP7021/09	6-7-8"	50		150	120	112	106	94	78	68	53	32		1530	112
FCP7021/10	7-8"	50		166	130	123	117	106	88	77	61	37		1655	123
FCP7021/11	7-8"	60		183	146	136	130	115	96	84	66	40		1780	134
FCP7021/12	7-8"	60		200	165	152	150	126	105	90	73	45		1960	145
FCP7021/13	7-8"	75		216	173	161	153	136	113	100	78	48		2090	156
FCP7021/14	7-8"	75		232	181	172	163	147	123	109	85	52		2215	167
FCP7021/15	7-8"	80		250	197	185	175	158	132	116	91	56		2340	178
FCP7021/16	7-8"	90		266	312	198	188	168	140	124	97	60		2460	189
FCP7021/17	7-8"	90		280	221	207	200	179	149	132	105	66		2590	200
FCP7021/18	8"	100		299	240	222	212	189	157	139	110	67		2720	211
FCP7021/19	8"	100		315	255	234	225	200	167	147	116	71		2840	222
FCP7021/20	8-10"	110		332	267	247	235	210	175	155	123	75		2970	234
FCP7021/21	8-10"	110		349	275	259	247	220	183	162	128	79		3110	245
FCP7021/22	8-10"	125		365	293	272	259	231	193	171	135	83		3210	256
FCP7021/23	8-10"	125		380	305	284	268	241	201	179	140	86		3335	267
FCP7021/24	8-10"	125		399	320	296	282	253	210	187	148	91		3460	278
FCP7021/25	8-10"	150		415	334	308	294	263	219	195	154	95		3585	290
FCP7021/26	8-10"	150		435	355	321	305	273	226	202	159	98		3710	301

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

8"8420 CAST IRON SUBMERSIBLE PUMP



PUMP TYPE	İNÇ	HP	FLOW RATE										Q	L	W
			m³/h	0	45	54	63	72	90	99	108	117	inç	mm	kg
			l/s	0	13	15	18	20	25	28	30	33			
FCP8420/02	6"	15		48	42	40	38	35	28	24	18	12		642	48
FCP8420/03	6"	20		70	60	57	53	49	39	33	26	18		830	70
FCP8420/04	6"	35		95	85	82	79	74	62	54	45	31		970	82
FCP8420/05	7-8"	40		115	104	101	97	91	76	65	54	41		1110	95
FCP8420/06	7-8"	50		141	126	123	117	109	91	78	67	51		1240	110
FCP8420/07	7-8"	60		164	146	141	136	128	107	91	77	59		1380	120
FCP8420/08	8"	75		188	169	165	159	150	125	108	91	71		1530	135
FCP8420/09	8"	75		210	188	182	174	164	135	117	95	76		1665	148
FCP8420/10	8"	85		230	207	200	193	181	148	129	107	84		1810	160
FCP8420/11	8"	85		252	226	218	208	195	159	135	113	86		1950	180
FCP8420/12	8"	100		277	249	241	231	216	177	154	126	99		2080	192
FCP8420/13	8-10"	100		299	267	260	247	232	190	165	137	108		2220	205
FCP8420/14	8-10"	110		322	287	278	265	249	205	189	146	114		2360	220
FCP8420/15	8-10"	110		345	307	296	282	264	220	195	155	121		2500	238
FCP8420/16	8-10"	125		368	327	314	299	289	235	201	164	128		2360	256
FCP8420/17	8-10"	125		391	347	332	316	297	250	212	173	135		2500	271
FCP8420/18	8-10"	150		414	369	356	339	317	265	227	187	147		2640	286
FCP8420/19	8-10"	175		436	389	375	358	335	279	240	197	155		2775	301

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

8"8530-8535 CAST IRON SUBMERSIBLE PUMP



PUMP TYPE	İNÇ	HP	FLOW RATE										Q	L	W
			m³/h	0	72	81	90	99	108	126	135	144	inç	mm	kg
			l/s	0	20	23	25	28	30	35	38	40			
FCP8530/02	6"	25		57	44	42	39	37	34	29	26	17		642	48
FCP8530/03	6"	30		82	64	61	57	54	49	40	37	26		830	70
FCP8530/04	6"	40		105	81	75	72	67	61	50	46	35		970	82
FCP8530/05	7-8"	50		137	104	98	91	85	76	62	52	43		1110	95
FCP8530/06	7-8"	60		165	124	117	109	102	93	74	65	54		1240	110
FCP8530/07	7-8"	75		193	145	137	130	120	110	88	76	64		1380	120
FCP8530/08	8"	85		219	165	155	146	136	124	99	85	71		1530	135
FCP8530/09	8"	100		244	186	176	166	153	139	112	97	82		1665	148
FCP8530/10	8"	100		270	200	189	176	163	146	116	100	83		1810	160
FCP8530/11	8"	110		299	222	210	196	180	164	129	111	92		1950	180
FCP8530/12	8"	125		327	245	232	217	201	185	145	126	107		2080	192
FCP8530/13	8-10"	125		353	263	248	232	215	194	153	131	109		2220	205
FCP8530/14	8-10"	150		380	286	267	250	230	211	166	143	119		2360	220
FCP8530/15	8-10"	175		414	306	290	271	250	231	182	156	131		2500	238

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

PUMP TYPE	İNÇ	HP	FLOW RATE										Q	L	W
			m³/h	0	54	72	90	108	126	144	162	-	inç	mm	kg
			l/s	0	15	20	25	30	35	40	45	-			
FCP8535/02	6"	30		57	50	46	43	39	34	28	20	-		697	54
FCP8535/03	8"	40		82	73	68	62	56	48	39	29	-		830	68
FCP8535/04	8"	50		108	96	90	83	75	66	52	38	-		969	81
FCP8535/05	8"	60		135	121	112	103	91	78	64	47	-		1106	94
FCP8535/06	8"	75		165	146	135	124	111	96	78	58	-		1245	107
FCP8535/07	8"	85		190	169	156	142	127	109	89	66	-		1383	120
FCP8535/08	8"	100		217	194	179	163	146	124	102	77	-		1522	132
FCP8535/09	8"	100		243	218	202	185	166	141	115	86	-		1659	145
FCP8535/10	8-10"	110		271	240	223	204	183	154	126	94	-		1797	158
FCP8535/11	8-10"	125		301	270	250	228	205	176	143	110	-		1936	177
FCP8535/12	8-10"	125		324	290	269	245	218	188	151	115	-		2074	190
FCP8535/13	8-10"	150		352	315	293	270	239	206	168	127	-		2213	203
FCP8535/14	8-10"	150		377	335	313	286	252	221	179	135	-		2352	217
FCP8535/15	8-10"	175		405	364	339	311	274	238	195	147	-		2491	230

W : Weight (Ağırlık) D : Diemeter (Çap) L : Length (Uzunluk)

TEKNİK BİLGİLER

KABLO SEÇİM ÇETVELİ-1

GÜÇ			DİREKT KALKIŞ											
HP	KW	VOLT	KABLO KESİDİ 3*...mm²											
			1,5	2,5	4	6	10	16						
		MAKSİMUM UZUNLUK												
0,5	0,37	220V	80	130										
0,75	0,55		55	90	140									
1,0	0,75		40	80	105	160								
1,5	1,1		30	50	75	115	190							
2,0	1,5		20	35	60	90	145	235						
3,0	2,2			30	50	70	120	185						

GÜÇ			DİREKT KALKIŞ												
HP	KW	VOLT	KABLO KESİDİ 3*...mm²												
			1,5	2,5	4	6	10	16	25	35	50	70	95	120	150
			MAKSİMUM UZUNLUK(Metre)												
1,0	0,75	380V	230												
1,5	1,1		180	235											
2,0	1,5		135	225	360										
3,0	2,2			190	300	460									
4,0	3,0			150	240	360									
5,5	4,0			110	170	260	450								
7,5	5,5			80	130	190	340	540							
10,0	7,5			60	100	150	250	410							
12,5	9,2			50	80	120	205	330	510						
15,0	11,0				60	100	170	280	440						
17,5	13,0					90	150	245	385						
20,0	15,0					80	130	210	330	460	660				
25,0	18,5						100	170	260	370	530				
30,0	22,0						90	140	220	310	440				
35,0	26,0							120	190	270	380	540			
40,0	30,0							100	170	230	330	460			
50,0	37,0								130	190	270	380	520		
60,0	45,0								110	160	230	320	440	550	
70,0	52,0									140	200	280	385	480	
75,0	55,0									120	170	240	330	410	530
80,0	59,0									115	160	230	310	390	500
90,0	66,0									110	150	220	290	370	470
100,0	75,0									96	140	190	270	330	425
110,0	81,0										125	175	245	300	380
125,0	92,0										110	160	220	275	340
150,0	110,0											130	180	220	290
180,0	132,0												150	190	240
200,0	150,0											130	170	220	
225,0	165,0											125	150	190	
250,0	185,0													170	
275,0	200,0													160	

KABLO SEÇİM CETVELİ-2

GÜÇ			YILDIZ ÜÇGEN KALKIŞ												
HP	KW	VOLT	KABLO KESİDİ 3*...mm²												
			1,5	2,5	4	6	10	16	25	35	50	70	95	120	150
			MAKSİMUM UZUNLUK(Metre)												
4,0	3,0	380V	140	230	370										
5,5	4,0		100	170	270	400									
7,5	5,5		70	120	200	300	500								
10,0	7,5		57	90	150	220	380								
12,5	9,2		46	70	120	180	310	490							
15,0	11,0		39	60	100	150	260	400							
17,5	13,0			55	90	130	230	335							
20,0	15,0			50	80	110	200	310	490						
25,0	18,5				60	90	160	250	400	560					
30,0	22,0				50	70	130	210	340	470					
35,0	26,0				46	68	110	180	290	410					
40,0	30,0					60	100	160	250	360	500				
50,0	37,0					40	80	130	200	290	410				
60,0	45,0						70	110	170	240	350	480			
70,0	52,0							95	150	210	305	420			
75,0	55,0							80	130	180	260	360	500		
80,0	59,0								120	170	245	340	475		
90,0	66,0								110	160	230	320	450	520	
100,0	75,0								100	150	200	290	380	440	540
110,0	81,0									135	185	260	340	405	495
125,0	92,0									120	170	230	300	370	450
150,0	110,0									100	140	200	250	300	370
180,0	132,0										120	165	210	260	310
200,0	150,0											150	190	230	280
225,0	165,0											130	170	200	240
250,0	185,0											125	160	190	230
275,0	200,0														
300,0	220,0														

MOTOR GÜCÜNE GÖRE, JENERATÖR SEÇİM CETVELİ

MOTOR GÜCÜ		JENERATÖR GÜCÜ	
		DİREKT KALKIŞ	
HP	kW	kW	KVA
3	2,2	6	7,5
4	3	8	10
5,5	4	10	12,5
7,5	5,5	12,5	15,6
10	7,5	15	18,8
12,5	9,2	18,8	23,5
15	11	22,5	28
17,5	13	26,4	33
20	15	30	38
25	18,5	40	50
30	22	45	57
35	26	52	65
40	30	60	75
50	37	75	94
60	45	90	112
70	51,5	105	131
75	55	120	150
90	66	135	170
100	75	150	190
125	92	185	230
150	110	210	260
180	132	160	323
200	147	280	360
225	165	325	404
250	185	365	454
275	200	390	485
300	220	430	535
330	240	470	584
360	265	520	646

MOTOR GÜCÜ		JENERATÖR GÜCÜ	
		DİREKT KALKIŞ	
HP	kW	kW	KVA
-	-	-	-
4	3	8	7,5
5,5	4	8	10
7,5	5,5	10,8	13,5
10	7,5	14	17,5
12,5	9,2	17,2	21,5
15	11	20,5	25,5
17,5	13	23,6	29,5
20	15	27	34
25	18,5	33	42
30	22	40	50
35	26	45	57
40	30	52	65
50	37	65	81
60	45	77	97
70	51,5	90	112
75	55	102	128
90	66	115	144
100	75	128	160
125	92	158	198
150	110	190	237
180	132	228	284
200	147	254	316
225	165	285	354
250	185	320	398
275	200	345	429
300	220	380	472
330	240	415	516
360	265	458	569

SU BORULARINDAKİ SURTUNME KAYBI HESAP ÇETVELİ

P.BORU DIŞ ÇAPI	25	32	40	50	63	75	90	110	140	160	200	225	280
P.BORU ANMA ÇAPI	20	25	32	40	50	65	80	100	125	150	175	200	250
METAL SU BORULARI	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	7"	8"	10"
m ³ /h	lt/dk	lt/sn	DÜZ BÜKÜM BORULARIN HER 100 METRESİNDEKİ SÜRTÜNME KAYBI (Metre)										
1,2	20	0,3	10,4	3,7	1,0	0,3							
1,5	25	0,4	15,8	5,7	1,5	0,5				ÇARPANLAR			
1,8	30	0,5	22,3	8,0	2,1	0,7				PVC BORU İÇİN			0,65
2,1	35	0,6	29,8	10,8	2,8	0,9	0,3			ALÜMİNYUM BORU İÇİN			0,70
2,4	40	0,7	38,2	13,8	2,7	1,2	0,4			YENİ ÇELİK BORU İÇİN			0,80
3,0	50	0,8	58,2	21,1	8,0	1,8	0,6			AZ PASLI ÇELİK BORU İÇİN			1,25
3,6	60	1,0	82,0	30,0	10,8	2,5	0,9						
4,2	70	1,2		40,0	13,9	3,3	1,1						
4,8	80	1,3		51,5	17,5	4,3	1,5						
5,4	90	1,5		64,0	21,4	5,4	1,8	0,5					
6,0	100	1,7		79,0	33,0	6,6	2,2	0,6					
7,5	125	2,1			47,0	10,0	3,4	0,9					
9,0	150	2,5			63,0	14,2	4,7	1,2	0,4				
10,5	175	2,9			82,0	19,0	6,3	1,6	0,6				
12,0	200	3,3				24,5	8,1	2,1	0,7				
15,0	250	4,2				37,5	12,3	3,2	1,1	0,4			
18,0	300	5,0				53,0	17,3	4,5	1,6	0,5			
24,0	400	6,7					29,5	7,8	2,7	0,9			
30,0	500	8,3					44,8	12,0	4,1	1,4	0,5		
36,0	600	10,0						16,9	5,8	1,9	0,7		
42,0	700	11,7						22,6	7,8	2,6	0,9		
48,0	800	13,3						29,0	10,0	3,4	1,2	0,4	
54,0	900	15,0						36,0	12,5	4,2	1,5	0,5	
60,0	1000	16,7							15,2	5,1	1,8	0,7	
75,0	1250	20,8							23,0	7,9	2,7	1,0	0,5
90,0	1500	25,0							32,6	11,2	3,8	1,4	0,7
105,0	1750	29,2								15,0	5,0	1,9	0,9
120,0	2000	33,3								19,4	6,5	2,4	1,2
150,0	2500	41,7								30,0	9,8	3,8	1,8
180,0	3000	50,0									13,8	5,3	2,5
240,0	4000	66,7									23,8	9,1	4,4
300,0	5000	83,3										13,9	6,6
360,0	6000	100,0										20,0	9,5
420,0	7000	116,7											12,8
480,0	8000	133,3											6,4
													2,1
													10,5
													3,5

*All is well
with Fanpo.*



FANMOT MOTOR POMPA ELEKTRİK MAK. VE SAN.LTD.ŞTİ.
Factory Address:2.Organize Sanayi Bölgesi Koçören Mah. 201. Cad. No: 21 Şanlıurfa
www.fanpo.com.tr
fanpo@fanpo.com.tr

2
0
2
6
-
0
1